



**Erie County Health Department**  
*An Accredited Public Health Department*

**Erie County Community Health Center**  
*A Federally Qualified Health Center*

**Peter T. Schade, MPH, REHS**  
*Health Commissioner*



June 24, 2025

John Poock  
3111 Harris Road  
Sandusky, OH 44870

Re: Mason Rd- proposed lot split- tract 3 – west of 9611 Mason Rd, Sandusky, OH

Dear Mr. Poock,

The soil evaluation conducted by Geophyta Inc. on June 2, 2025, found the following information:

Test hole A:

The soil has characteristics of a loam from 0-12 inches, a sand from 12– 17 inches, and a loam from 17-19 inches. Rock was observed at 19 inches.

Test Hole B had similar characteristics to test hole A and had rock observed at 13 inches.

The site review conducted by this department found these conditions to exist as indicated.

Public water is available to the property.

The following information was also determined from the site and soil evaluation:

Gallons per day = 480

Soil infiltration loading rate = .6 gal/day/ft<sup>2</sup>

Lineal loading rate = 3.3 gal/day/ft

Length of absorption area = 150ft

Width of absorption area = 30ft

**Depth to limiting condition = rock observed at 13 Inches**

The proposed lot seems to be approvable if a sewage system design is submitted showing the sewage treatment system and replacement areas situated within suitable areas shown on the soils report.

**Board of Health:** Linda Miller-Moore (Board President); Dina C. Bauer, DPM (President Pro-Tem);  
Michael Bixler; Ron Brown; Natalie Felter; Richard R. Keller, MD; Bob Lippert;  
Adam Machoukas; Charles M. Murray; Leroy E. Sizemore; Joey Supina

Page 2

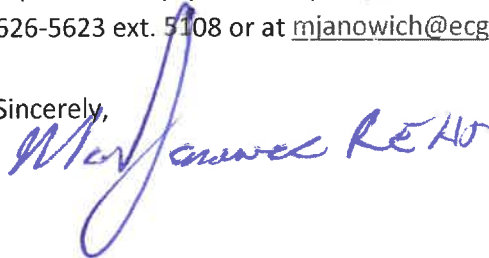
Before a sewage disposal system permit can be issued, the following will need to be completed and submitted to the health department:

1. Submit a final survey/approval for the lot split showing the lot lines for the newly created lot.
2. Submit a system design that has been created by a registered installer or sewage system designer. The design must show the details of the system design.
3. Submit the completed sewage treatment system application and permit fee. The current permit fee is \$884.00. The permit is valid for one year from the date it is issued. A separate sewage permit application and fee will be required for each sewage treatment system design submitted for review.

Please note once the installation is completed, the property owner will be required to obtain an annual operation permit from this department. The annual operation permit fee is \$100.00 and will be mailed to you upon final approval of the installation of the sewage treatment system.

If you have any questions, please contact me Monday through Friday from 8:00 a.m. to 4:30 p.m. at 419-626-5623 ext. 5108 or at [mjanowich@ecghd.org](mailto:mjanowich@ecghd.org).

Sincerely,

A handwritten signature in blue ink, appearing to read "Mark Janowich REHS".

Mark Janowich, REHS  
Director of Environmental Health

**Board of Health:** Linda Miller-Moore (Board President); Dina C. Bauer, DPM (President Pro-Tem); Michael Bixler; Ron Brown; Natalie Felter; Richard R. Keller, MD; Bob Lippert; Adam Machoukas; Charles M. Murray; Leroy E. Sizemore; Joey Supina

420 Superior Street, Sandusky, Ohio 44870 • Phone (419) 626-5623 • Toll free (888) 399-6065  
Fax (419) 626-8778 • [www.eriecohealthohio.com](http://www.eriecohealthohio.com)